

The Classic Beauty of an Eggers' Door
in a Lightweight Construction...




Eggers Industries

Foam Core Doors



Eggers' Foam Core door is everything you would expect from an Eggers door...high-quality, innovative, and stunning. What you might not expect is its lightweight construction, creating an ease of use and flexibility standard weight doors cannot match.

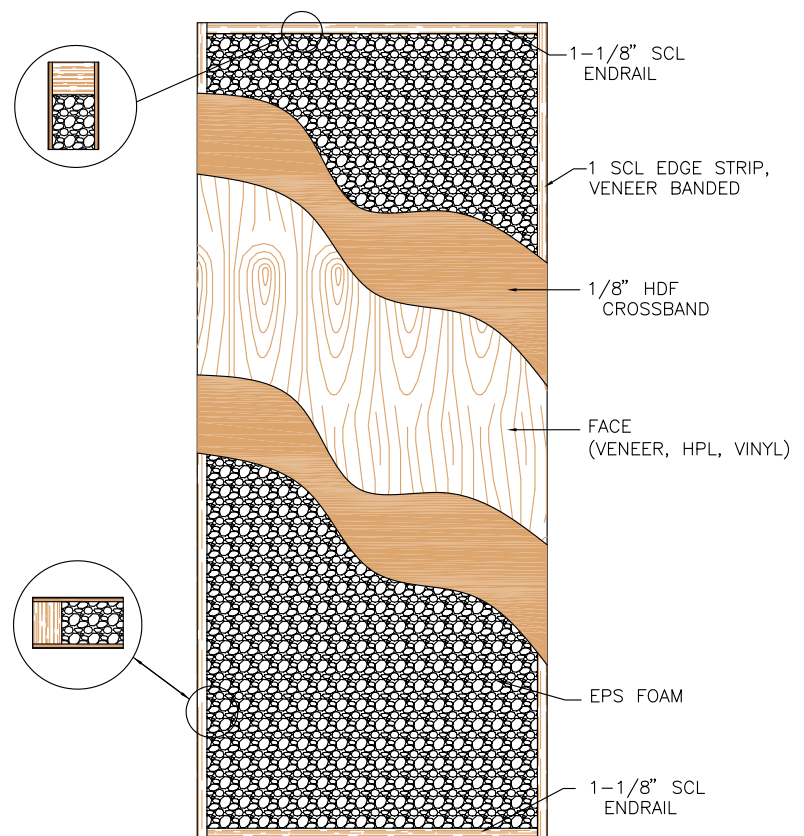

Perfect for office systems, assisted living centers, sliding doors, or unique applications such as yachts. Eggers' Foam Core doors put less stress on the frame opening, are easier to move and install, and contribute towards LEED credits, all while offering the same beauty and style of Eggers' traditional wood core doors.

For more information or pricing on our Foam Core door offerings, please contact us at 920.722.6444 or visit www.eggersindustries.com.

ENGINEERING SPECIFICATIONS

Light-Weight Foam Core Door

Non-Rated Construction

Max. Size	4' x 10'
Thickness	1-3/8" or 1-3/4"; other thicknesses may be available with additional engineering and lead time
Core	Modified EPS Foam Core
Stiles	1" structural composite lumber with matching or compatible veneered edges; solid lumber edges available
Rails	1-1/8" structural composite lumber
Reinforcements	Wide stiles, rails and blocking as requested or required
Faces	All available domestic and foreign veneers; HPDL, MDO and Vinyl
Crossbands	1/8" HDF
Lites	Max. height 36"; one cutout per door; requires special liner built into core; 6" lite-lock margins from lite or lock cutout
Latching Hardware	Most latching hardware allowed
Hinges	Butt hinges; pocket pivots, continuous hinges
Flushbolts	Automatic corner or extension bolts up to 36"
Exit Hardware	Rim, surface vertical rod (full or top rod only), and concealed vertical rod exit hardware
Closers, Stops, Holders	Concealed and surface hardware
Drop Seals	Surface, semi-mortised or mortised
Special Details	Machining for hardware; installation of lites; sketch faces (same both faces); solid wood grillwork and divided lites, shallow (3/64") reveals
Finish	UV-cured, primed, sealer, full sealer, catalyzed polyurethane and opaque varnish
Warranty	One year from date of original installation - not suitable for exterior installations
LEED Contributions	MR 4: Recycled Content; EQ 4.4: Composite Wood, Agrifiber, and Adhesives Contain No Added Urea-Formaldehyde



Stile & Rail Doors, Door Frames, Veneered Components, Plywood

Two Rivers Division
 One Eggers Drive
 Two Rivers, WI 54241
 Phone: 920.793.1351
 Fax: 920.793.2958
www.eggersindustries.com

Flush Doors

Neenah Division
 164 North Lake Street
 Neenah, WI 54956
 Phone: 920.722.6444
 Fax: 920.722.0357
 email: sales@eggersindustries.com